

Model 34-05 Chest Freezer

Standard 5 cu. ft. Freezer



Safe, Economical & Easy Access

Freezers are manufactured using environmentally safe urethane foam insulation. Counter-balanced lid with non-magnetic gasket and separate Keyed Hasp Lock.

CFC Free

All products are manufactured using CFC free, non-toxic, non-combustible and non-ozone depleting refrigerant. Compressors are permanently lubricated and hermetically sealed.

Sturdy Construction

Outer cabinet is made of welded steel with high-impact smooth powder coat finish. Inner compartment is made of aluminum with clear coat finish.

Temperature Display / Alarm

Digital readout displays internal temperature in either Degrees Centigrade or Fahrenheit. An audible alarm sounds to alert personnel of a rise in internal temperature. (No Battery Backup)





Exterior Dimensions	33"H x 28.5"W x 22.5"D
Interior Dimensions	26"H x 23.5"W x 15.5"D
Temperature Range	0 C /32F to -34 /-30F
Capacity	5 cubic foot
Insulation	Urethane
Door	Key Locking
Casters	None (Can be added for additional cost)
Temperature Controller	Digital Display
Alarm (No Battery Backup)	Audible Only
Refrigeration	
Compressor - High stage	1/8 hp
Compressor	(Not Applicable)
Refrigerant	R-404A
Voltage	115/60/1
Refrigerant Control	Capillary Tube
Evaporator	Cold Wall
Defrost	Manual
Condenser	Shell
Running Amps	8 amps (115v)

Accessories and Upgrades

- Internal Heater
- Internal Fan
- Cyro-Gloves
- CAL9500 Temperature Controller for Ramp/Soak Control
- CALgrafix Software (only available with upgrade to CAL9500 Controller)
- 6" Chart Recorder
- Automatic Voice Pager Dialer
- 2" Casters (2" Locking Caster are also available)

Note: Some items listed in the upgrades and accessories will require an end rack to be added to freezer.

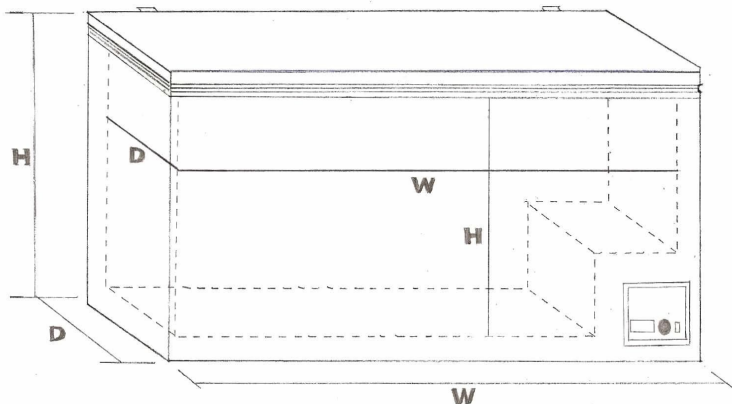

ScienTemp™

LABEQUIP

170 Shields Court Unit 2
Markham, ON L3R 9T5
TEL: (905) 475-5880 ext. 226
FAX: (905) 475-1231